


Everest SprayClean systems are designed to clean the parts, automatically with pressurized hot water and bio-degradable detergents. SprayClean systems are front loading machines. SprayClean models have heating insulation for the tank, vapour extraction, pneumatic lid as standart equipments. Also rinsing and drying processes could be added in this models according to customer requirments. MultiStage systems are controlled with PLC system. Optional equipments are disc type oil skimmers, oil water separator units, filtration units, discharge pumps, loading car, washing cabin insulationetc

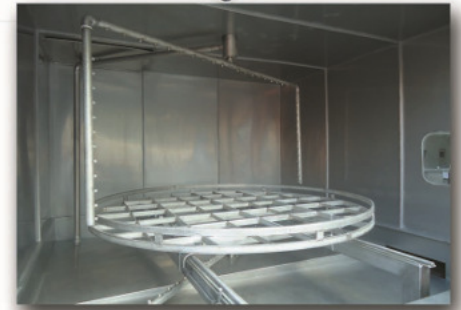

TECHNICAL FEATURES

MODEL	PROCESS	BASKET DIAMETER	LOADING WEIGHT	LOADING HEIGHT	EXTERNAL DIMENSIONS				TANK CAPACITIES	PUMP RATE	PUMP PRESSURE	HEATING	
					WIDTH	LENGTH	HEIGHT (LID CLOSED)	HEIGHT (LID OPEN)					
		mm	kg	mm	mm	mm	mm	mm	lt	lt/min	bar	kW	
SPRAYCLEAN W	Washing	SprayClean 90-W	900	300	500	1400	1550	2050	2700	250	140	3	7,5
		SprayClean 120-W	1200	450	650	1750	1950	2150	2900	400	190	3,2	15
		SprayClean 150-W	1500	600	750	2100	2400	2400	3400	550	250	3,3	22,5
		SprayClean 180-W	1800	800	900	2400	2700	2600	3800	700	320	4	22,5
SPRAYCLEAN WR	Washing Rinsing	SprayClean 90-WR	900	300	500	1900	1550	2050	2700	250/180	140/120	3 / 2	7,5/7,5
		SprayClean 120-WR	1200	450	650	2250	1950	2150	2900	400/250	190/140	3,2 / 3	15/7,5
		SprayClean 150-WR	1500	600	750	2100	3000	2400	3400	550/360	250/190	3,3 / 3,2	22,5/ 15
		SprayClean 180-WR	1800	800	900	2400	3300	2600	3800	700/450	320/250	4 / 3,3	22,5/15
SPRAYCLEAN WRD	Washing Rinsing Drying	SprayClean 90-WRD	900	300	500	1900	1550	2200	2700	250/180	140/120	3 / 2	7,5/7,5/9
		SprayClean 120-WRD	1200	450	650	2250	1950	2300	2900	400/250	190/140	3,2 / 3	15/7,5/12
		SprayClean 150-WRD	1500	600	750	2100	3000	2600	3400	550/360	250/190	3,3 / 3,2	22,5/15/18
		SprayClean 180-WRD	1800	800	900	2400	3300	2800	3800	700/450	320/250	4 / 3,3	22,5/15/24